


Eyebolts


BUTT WELDED EYEBOLT

- 44W material (60,000 psi)
- E = $\varnothing 9/16"$ if 5/8"-11 UNC thread
 $\varnothing 11/16"$ if 3/4"-10 UNC thread
- L = 18" and 24" under eye
- 5/8" rated for 2,300 lbs
- 3/4" rated for 3,600 lbs

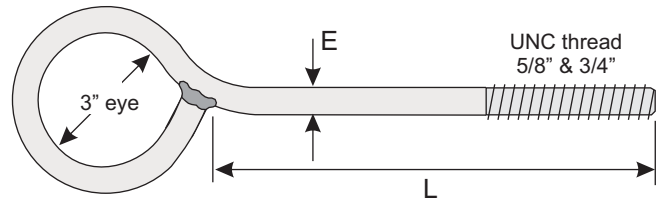


WELDED RETURN EYEBOLT

- 44W material (60,000 psi)
- E = $\varnothing 9/16"$ if 5/8"-11 UNC thread
 $\varnothing 11/16"$ if 3/4"-10 UNC thread
- L = 18" and 24" under eye
- 5/8" rated for 2,300 lbs
- 3/4" rated for 3,600 lbs

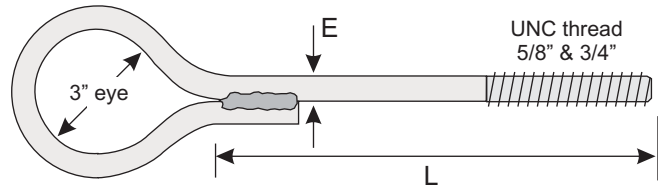


FORGED SLUSHER EYEBOLT

- 5140 Alloy (120,000 psi)
- E = $\varnothing 1-1/8"$
- L = 18" and 24" under eye
- 3/4"-10 UNC thread
- rated for 9,000 lbs

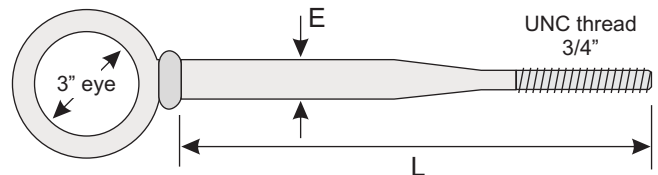


FORGED OVAL EYEBOLT

- 5140 Alloy (120,000 psi)
- E = $\varnothing 5/8"$ and $\varnothing 3/4"$
- L = 12" and 18" under eye
- 5/8"-11 and 3/4"-10 UNC thread
- 5/8" rated for 4,000 lbs
- 3/4" rated for 6,000 lbs

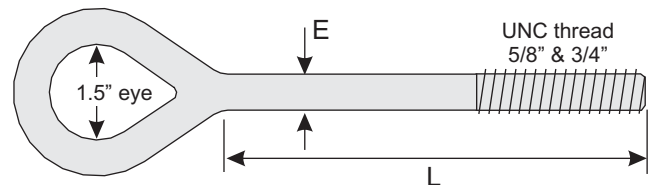

CABLE EYEBOLT

- E = 0.6" cable diameter
- F = $\varnothing 1-1/8"$ fittings, 1045 steel (80,000 psi)
- L = approx. 28" overall
- 5/8"-11 and 3/4"-10 UNC thread
- 5/8" rated for 2,100 lbs
- 3/4" rated for 2,800 lbs

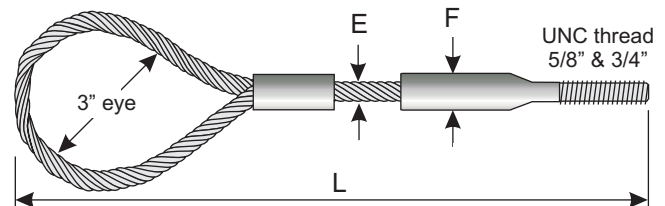

REBAR EYEBOLT

- E = #6, #7, and #8 rebar (90,000 psi)
- L = 18" to 96"
- spinner head used for resin installation
slashed end recommended
- butt welded (shown) or welded return

optional 1-1/8" square spinner head

