



WELDED WIRE MESH

- to ASTM A185 specifications
- wire to ASTM A82 specs (75,000 psi tensile)
- minimum weld shear strength (lbs)
= 35,000 x wire cross sectional area (in²)
- ends flush cut for safer handling
- available galvanized
- T = 4, 6, 8, 9 and 10 gauge
- W = 48" to 96" wide
- L = 48" to 24' long sheet or to 100' long roll
- S = 4" x 4" spacing

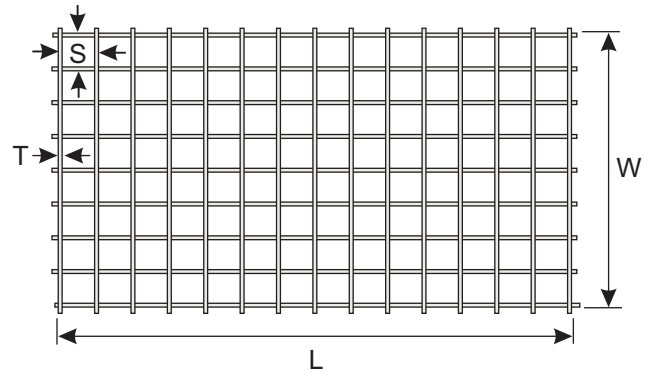


CHAINLINK MESH (FROST FENCING)

- galvanized to ASTM A392 specifications
- T = 6, 9, 11 and 12 gauge
- W = 4', 5', 6', 7', 8' and 10' wide
- L = rolls 25', 50' and 100' long
- S = 2", 2-1/2" and 3" opening size

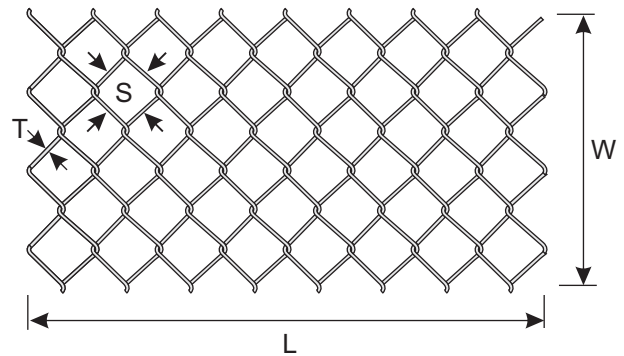


EXPANDED METAL MESH

- carbon steel to ASTM A1011 specifications
- up to 4x stronger than welded wire mesh at joints
- available galvanized
- T = 12 gauge (0.106")
- W = 4', 5' and 6'
- L = 4' to 10'
- S = 2-1/2"x4" or 3"x6" opening size

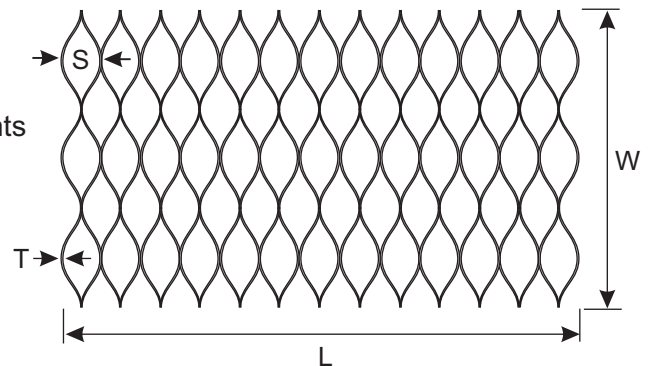

GABION MESH

- to ASTM A975 specifications
- galvanized
- weight = 0.365 lbs/ft²
- T = 11 gauge (0.120")
- W = 2m (79") or 3m (118")
- L = 30m (99')
- S = 3.25" x 4.5" opening size

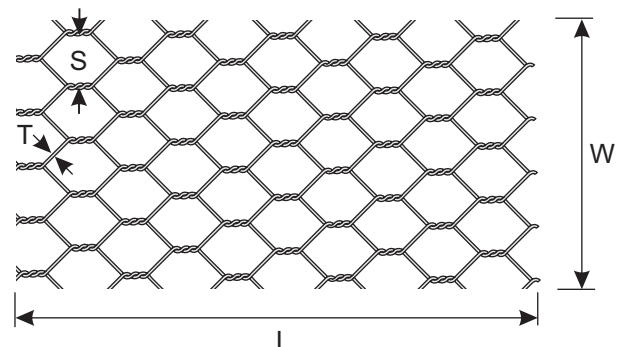


Formed Mesh

MESH CHANNELS

For construction of shotcrete barricades and fill fences


- mesh to ASTM A185 specifications
- wire strand to ASTM A82 specifications (75,000 psi tensile minimum)
- minimum weld shear strength (lbs) = 35,000 x wire cross sectional area (in²)
- ends flush cut for safer handling
- T = 6 gauge (0.192")
- H/W = 3" x 3", 6" x 7.5", 7.5" x 9",
- L = 10'
- S = 4" x 4" spacing

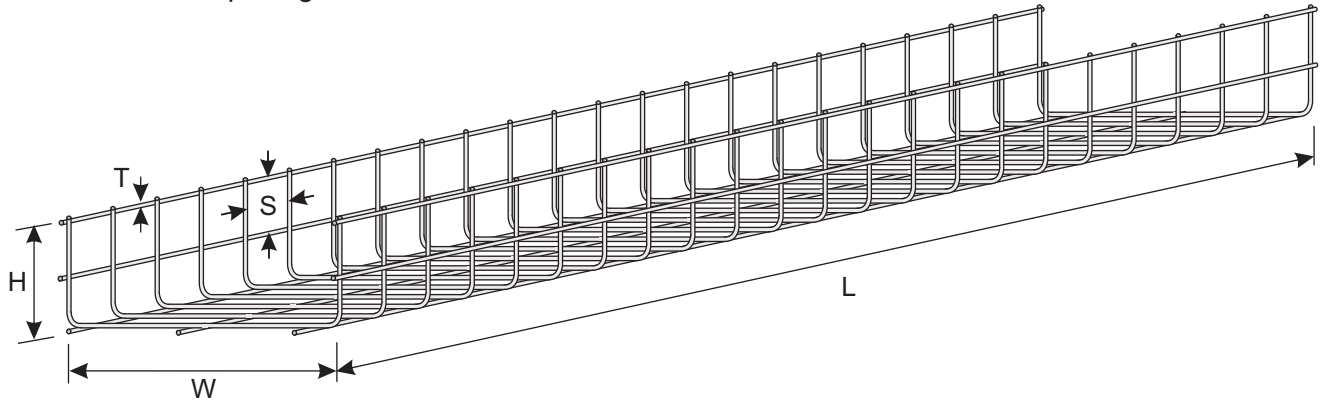

MESH RETAINERS

For construction of soil retaining walls

- mesh to ASTM A185 specifications
- wire strand to ASTM A82 specifications (75,000 psi tensile minimum)
- minimum weld shear strength (lbs) = 35,000 x wire cross sectional area (in²)
- ends flush cut for safer handling
- available galvanized
- support struts hold mesh at 80° angle
- T = mesh and support struts 4 gauge (0.225")
- H/W = 18" x 18", 18" x 22", 18" x 24" and 20" x 22"
- L = 10'
- S = 4" x 4" spacing

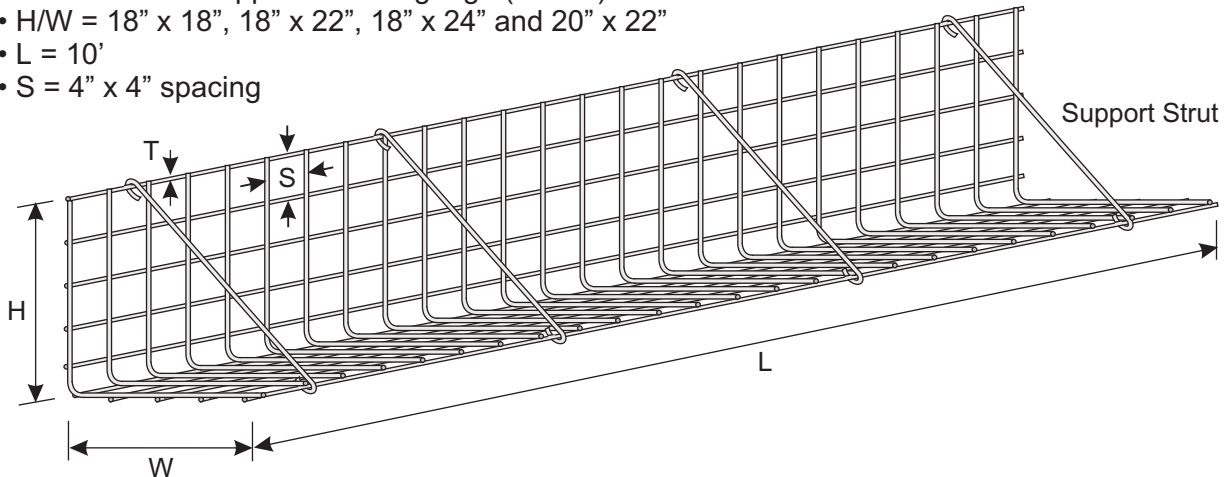

Custom sizes available on request