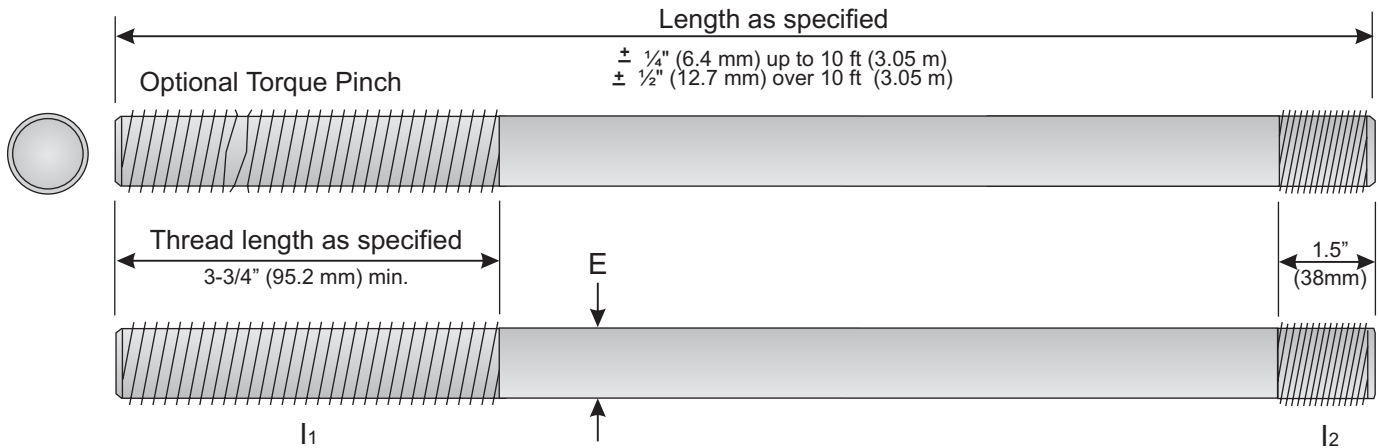


Extension Bolt (7/8" High Tensile) 2 part with coupler










DIMENSIONS:

7/8" High Tensile Extension Bolt	
E Body Diameter	±0.88" (±22.3mm)
l1 Thread Size (left & right)	7/8" - 9 UNC
l2 Thread Size (left & right)	7/8" - 14 UNF

TECHNICAL DATA:

7/8" High Tensile Extension Bolt	
Minimum Yield Strength	57,200 lbs (254 kN)
Typical Ultimate Strength	74,500 lbs (330 kN)
Ultimate Axial Strain	Minimum 1.85%
Torquing Pinch (optional)	Nominal 70 ft - lbs

HARDWARE:

						
1 - 5/16" Hex Nutrunner x 7/8" hex socket	7/8" UNC Hex Nut	7/8" Hardened Round Washer	TSW - 1 Spherical Seat Washer	7/8" UNF Coupler	D5 - 1 Shell Plug for resin installation	D5 - 1 Expansion Shell Ø 1-3/4"