

Aliva®-403.4 Liquid Dosing Unit

Product Description

The dosing unit Aliva®-403.4 for liquid accelerators enables an infinite setting of accelerator for small quantities.




Uses

- The BASIC Version is equipped with a simple control which is done entirely on the dosing unit itself, i.e. the amount of additive is set manually by means of the dosing knob and thus cannot be synchronized with a concrete spraying machine.
- The Aliva®-403.4 is most suitable for manual spraying together with the concrete spraying machines Aliva®-246 / Aliva®-252 and Aliva®-263.

Product Data

Technical Data

Dimensions

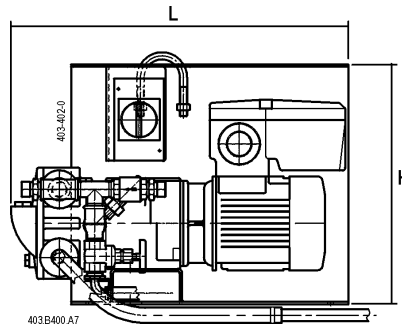

Length L	575 mm
Width	335 mm
Height H	430 mm
Weight	approx. 60 kg

Drive

Electric

Motor output	0,75 kW
Voltages	200 - 480 V
	50/60 Hz
Protection	IP 54/65

Theoretical Conveying Output

Conveying

Conveying output *	24-240 l/h
Output pressure max.	7 bar

* with the following tolerances (measured with water):
 25 l/h \pm 1 l/h
 240 l/h \pm 7 l/h

Health and Safety Information

Important Notes

For the safe, correct operation of the unit please consult the current machine operating manual . Sika Schweiz AG cannot accept any liability for injury or damages caused by improper use, incorrect or inadequate operation, maintenance or repairs.

Legal Disclaimer

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



Sika Schweiz AG
Postfach
Tüffenwies 16
CH-8048 Zürich
Schweiz

Phone +41 56 649 31 11
Fax +41 56 649 32 04
www.sika.com
info.stm@ch.sika.ch