

Aliva®-285

Concrete Spraying Machine

Description

The Aliva-285 is a very sturdily constructed two-axle concrete spraying machine for the processing of wet or dry mix.

Uses


The machine is suitable either for manual spraying or by means of a robotic arm. The Aliva-285 is developed for the application of shotcrete in tunnels, mines and slopes.

- The machine has been designed especially for steel fibre spraying.
- The Aliva-285 is available as EXTENDED version with electric drive and synchronized to the EXTENDED Dosing unit.


Technical data

Dimensions

With chassis

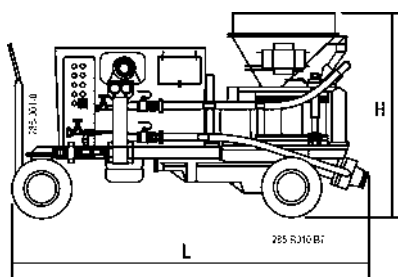

With skid

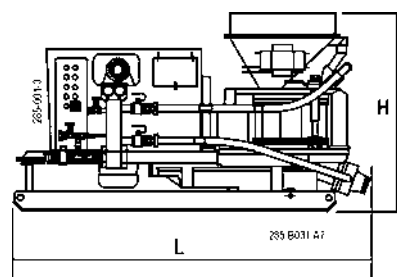

Length L1	2460 mm
Width	1100 mm
Height H1	1410 mm
Weight	approx. 1550 kg
Content of hopper	100 liters

Length L2	2380 mm
Width	1100 mm
Height H2	1310 mm
Weight	approx. 1600 kg
Content of hopper	100 liters

Drive

Electric (BASIC/EXTENDED)

Motor output	11 kW
Speed range	900 - 2100 rpm
Voltages	400 V 50 Hz
	400/440V 60 Hz
	220 V 50 Hz
	220 V 60 Hz
Protection	IP



Authorized Distributor:

Thiessen Team USA
1840 Sharps Access Rd,
Elko, Nevada 89801
Ph: (775) 777-1205 Fax: (775) 777-1215
www.thiessenteam.com

Theoretical conveying**Conveying (dry and wet)**

Rotor L	Hose Ø mm	Conveying output *m ³ /h	max. Grain mm	max. conveying distance m horizontal/vertical
25	60	8,0-11,0	20	Dry: 300/100** Wet: 40/30
	65	12,0-15,0	20	
	80	16,0-19,0	25	
	>80	>19,0	30	

* With theoretical filling degree of 100%, if motor with 60 Hz = 20% higher conveying capacity

** more than 80 m conveying distance, use steel tubes

Theoretical air consumption

Hose Ø mm	Air consumption Nm ³ /min. ***		
	Dry spraying		Wet spraying
	60 m	120 m	40 m
60	11	13,5	15
65	13	15,5	18,5
80	16	20	24
>80	>16	>20	>24

*** Air consumption data are approximate values and are depending on conveying output, conveying distance and hose diameter.

1 Nm³/min = 35 cfm

Safety instructions**Important safety regulations**

For detailed informations please consult the latest edition of the machine operating manual.

Legal references

Information given, in particular suggestions made for use and application of our products are based on our current knowledge and experience in the normal case at the time of printing. In practice, the difference in materials, substrates and environmental conditions can cause deviation from this information. Sika guarantees for its products the compliance of technical characteristics according to the Technical Data Sheets up to expiry of shelf life. Users of the products must always consult the latest edition of Technical Data Sheet under «www.sika.ch/stm». Our current General Conditions are applicable.



Aliva-285 EXTENDED



Authorized Distributor:

Thiessen Team USA
1840 Sharps Access Rd,
Elko, Nevada 89801
Ph: (775) 777-1205 Fax: (775) 777-1215
www.thiessenteam.com

